

1/5" FORMAT 320 X 320-PIXEL EVENT-BASED METAVISION® SENSOR COMPACT OPTICAL MODULE WITH EMBEDDED FEATURES




GENX320 CN1



YUN X



Innovation Limited

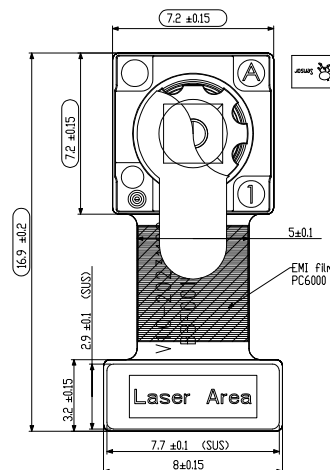

PARAMETER	UNIT	SPECIFICATION
Body dimension	mm	7.2 x 7.2 x 3.58
Outline dimension	mm	8 x 16.9
Connector		Hirose BM23FR Series
#Connector pins		20
Control Interface		I ² C
Data Interface		MIPI
Lens Mount		M5
Aperture		f/2.0
Focal Length		2.23 mm
HFoV/VFoV	deg	47.4
DFoV	deg	63.7
IR cut filter		Yes

FEATURES

- Prophesee GenX320 1/5" format 320x320 event-based vision sensor
- 6mm x 6mm flex-rigid module substrate
- 63.7° DFoV M5 lens mounted using threaded lens holder
- 20 pin board-to-board connector provides full sensor I/O breakout
- High-speed event data output (equivalent to >10kfps time resolution) with row-level 1μs-precision time stamping
- 0.05 lux Low light cutoff
- High dynamic range >140dB
- Ultra-low power mode 36μW
- Very-low operating power from 3mW
- Embedded features: Anti-flicker filtering (AFK) + Event-Rate Controller (ERC) + Spatio-Temporal Contrast Filter (STC)
- Ambient Light Measurement
- ML-friendly compressed and uncompressed event data streams
- 1-lane MIPI D-Phy output interface

PROPHESSEE GENX320 - CN1

APPLICATIONS

- Fall Detection
- Gesture Recognition
- AIoT
- Smart Home
- Always on cameras



DESCRIPTION

Housed in a compact optical module with flex and Hirose board-to-board connector, the GenX320 CN1 offers a powerful solution for diverse embedded vision applications. At the heart of the CN1 is a 320x320 1/5" format 6.3µm pixel BSI stacked event-based Metavision® sensor. GenX320 was designed with the explicit goal to improve integrability and usability in at-the-edge vision systems. This includes event data pre-processing and formatting, data interface compatibility and low-latency connectivity to different processing platforms including latest low-power, neuromorphic processors. The sensor has been optimized for very low power operation, featuring a hierarchy of application-specific power modes. GenX320 contains an integrated Event Signal Processing (ESP) pipeline which includes timestamping, filtering, throughput regulation and data formatting functions. An Event Rate Controller (ERC) allows to cap the output event rate to a programmable limit. A Spatio-Temporal Contrast filter (STC) detects and removes redundant bursts and trails of events triggered by high contrast features in the scene. An Anti-Flicker (AFK) filter detects and filters events generated by flickering light sources in either band pass or band stop modes.

SENSOR LOW POWER MODES

MODE	ULTRA LOW POWER	LOW POWER STANDBY	LOW POWER MONITOR	CPI STREAMING	CPI STREAMING	MIPI STREAMING
Sub-system				100kEPS CPI @10MHz	1MEPS CPI @10MHz	10MEPS MIPI @800MHz
Pixel array	3x3 GCD		320x320 pixels	320x320 pixels	320x320 pixels	320x320 pixels
Digital ICN + CPU	Powered down	Powered, Clocked	Powered, Clocked	Powered, Clocked	Powered, Clocked	Powered, Clocked
Digital readout	Powered down	Powered, Clocked	Powered, Clocked	Powered, Clocked	Powered, Clocked	Powered, Clocked
Digital ESP + Output I/F	Powered down	Powered, Gated	Powered, Gated	Powered, Clocked	Powered, Clocked	Powered, Clocked
	Total: 36µW	Total: 1.8mW	Total: 2.9mW	Total: 3mW	Total: 4.8mW	Total: 22.8mW
	AUTONOMOUS FAST WAKEUP <1ms			WAKEUP >100ms UNDER HOST CONTROL		

ORDERING CODES AND BRIEF DESCRIPTION

OPTICAL MODULE - GENX320MP - CN1 GENX320MP <https://www.prophesee.ai/cn1-genx320-info/>